


Web Guide Actuator

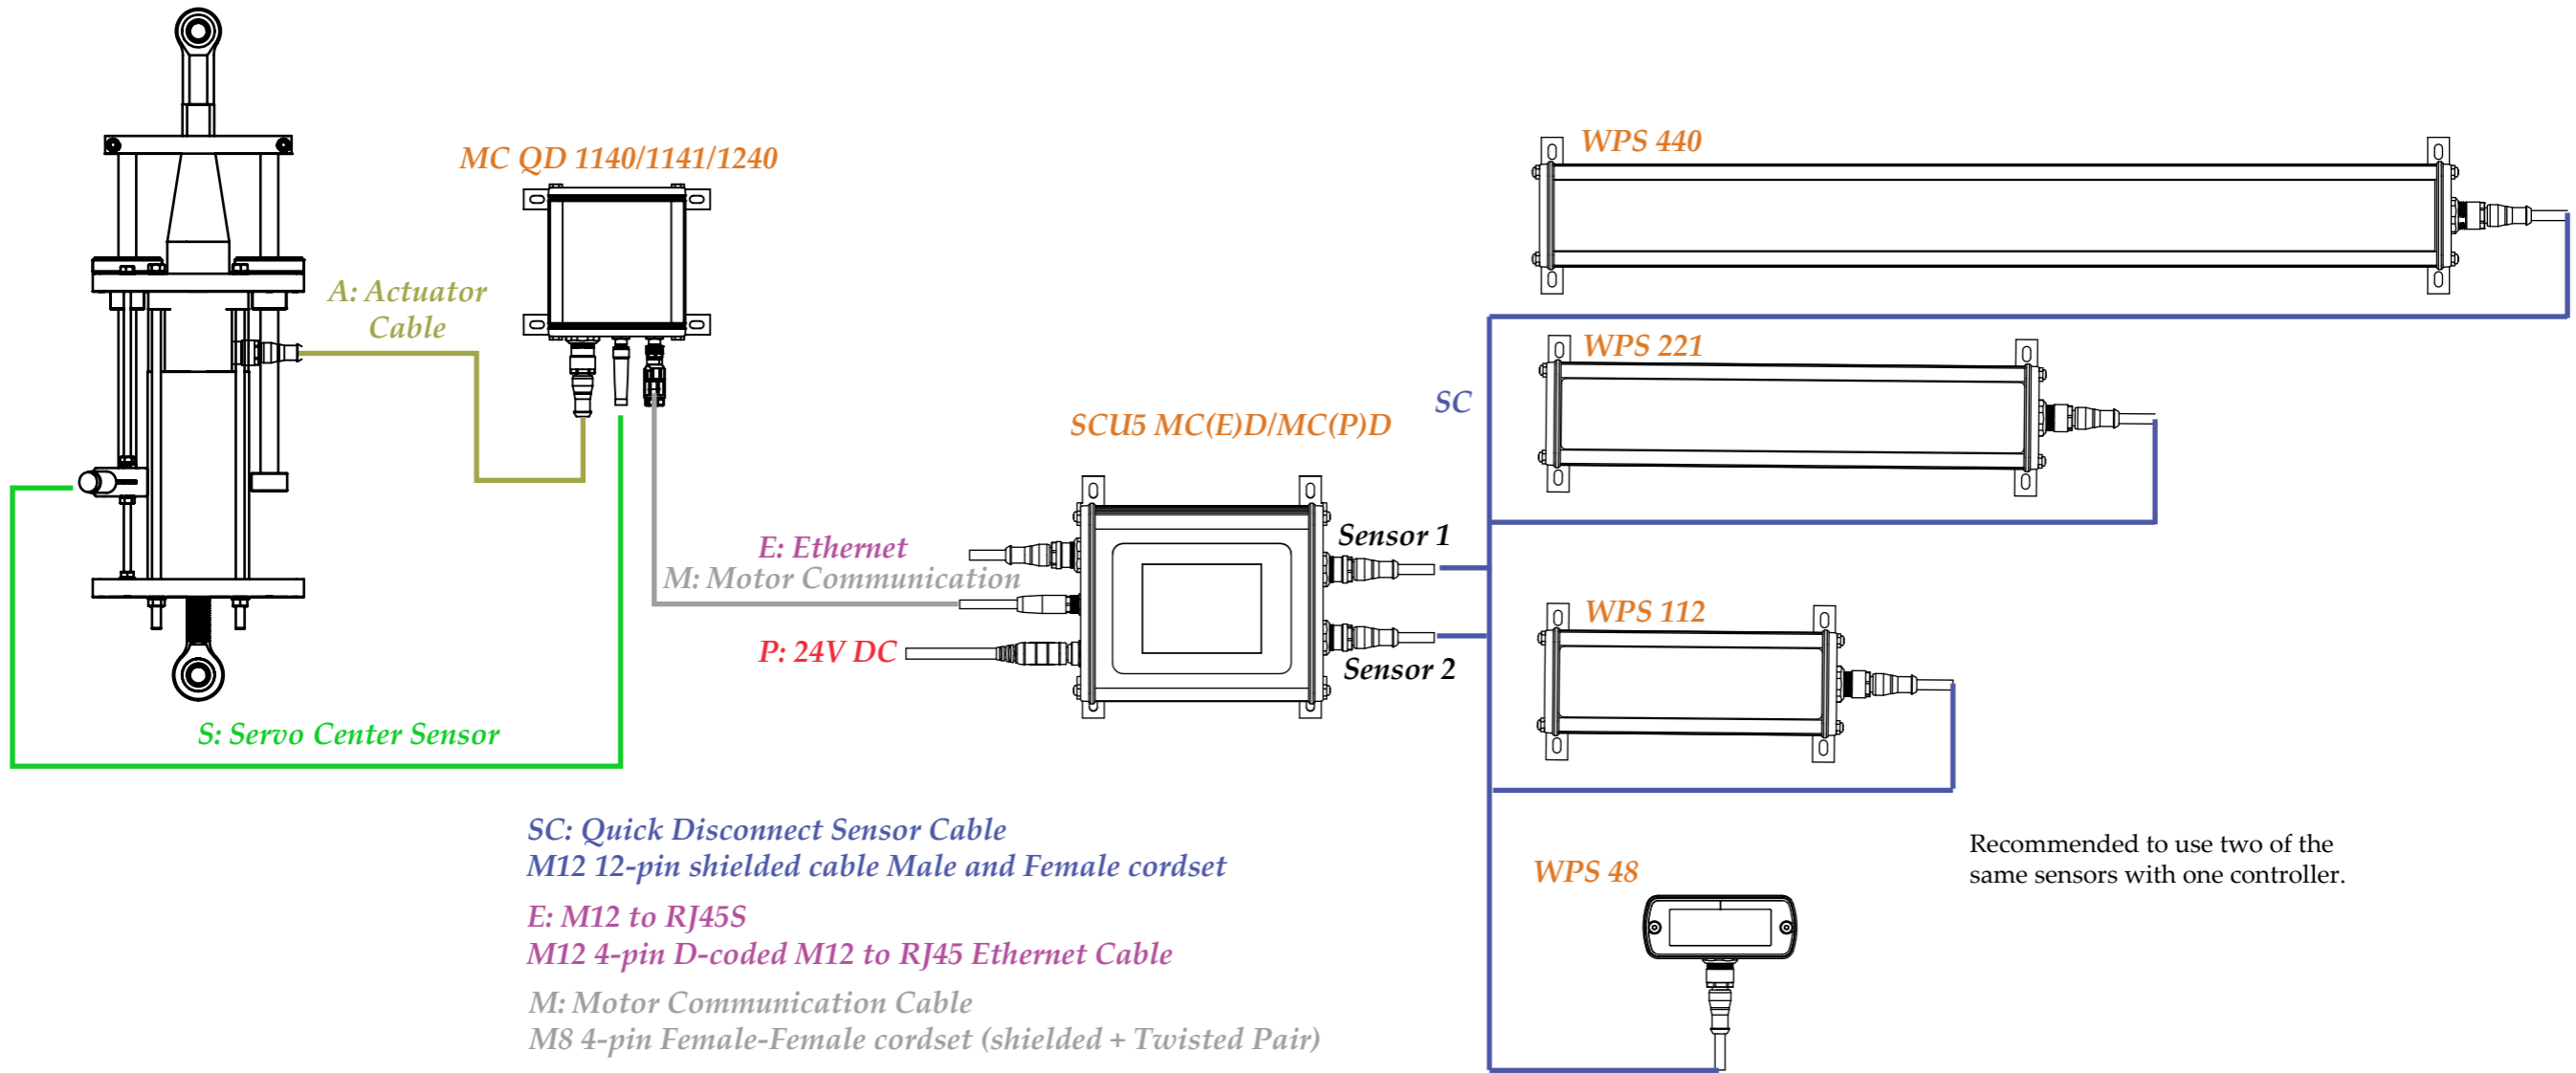

*SC: Quick Disconnect Sensor Cable
M12 12-pin shielded cable Male and Female cordset*

*E: M12 to RJ45S
M12 4-pin D-coded M12 to RJ45 Ethernet Cable*

*M: Motor Communication Cable
M8 4-pin Female-Female cordset (shielded + Twisted Pair)*

*P: 24 V DC Input Power Cable
DC Power Connector 2.5mm tip for 24V DC Power flying lead*

Recommended to use two of the same sensors with one controller.