


- \* RTI with 3.5" or 5.7" screen are available
- \* Each SCU5 controller should have a unique IP address
- \* RTI should also have a unique IP address
- \* Current RTI Software Supports 6 SCU5 controllers
- \* Maximum of 32 SCU5 controllers can be connected to a single RTI
- \* Digital Machine Speed Sync signal is also available

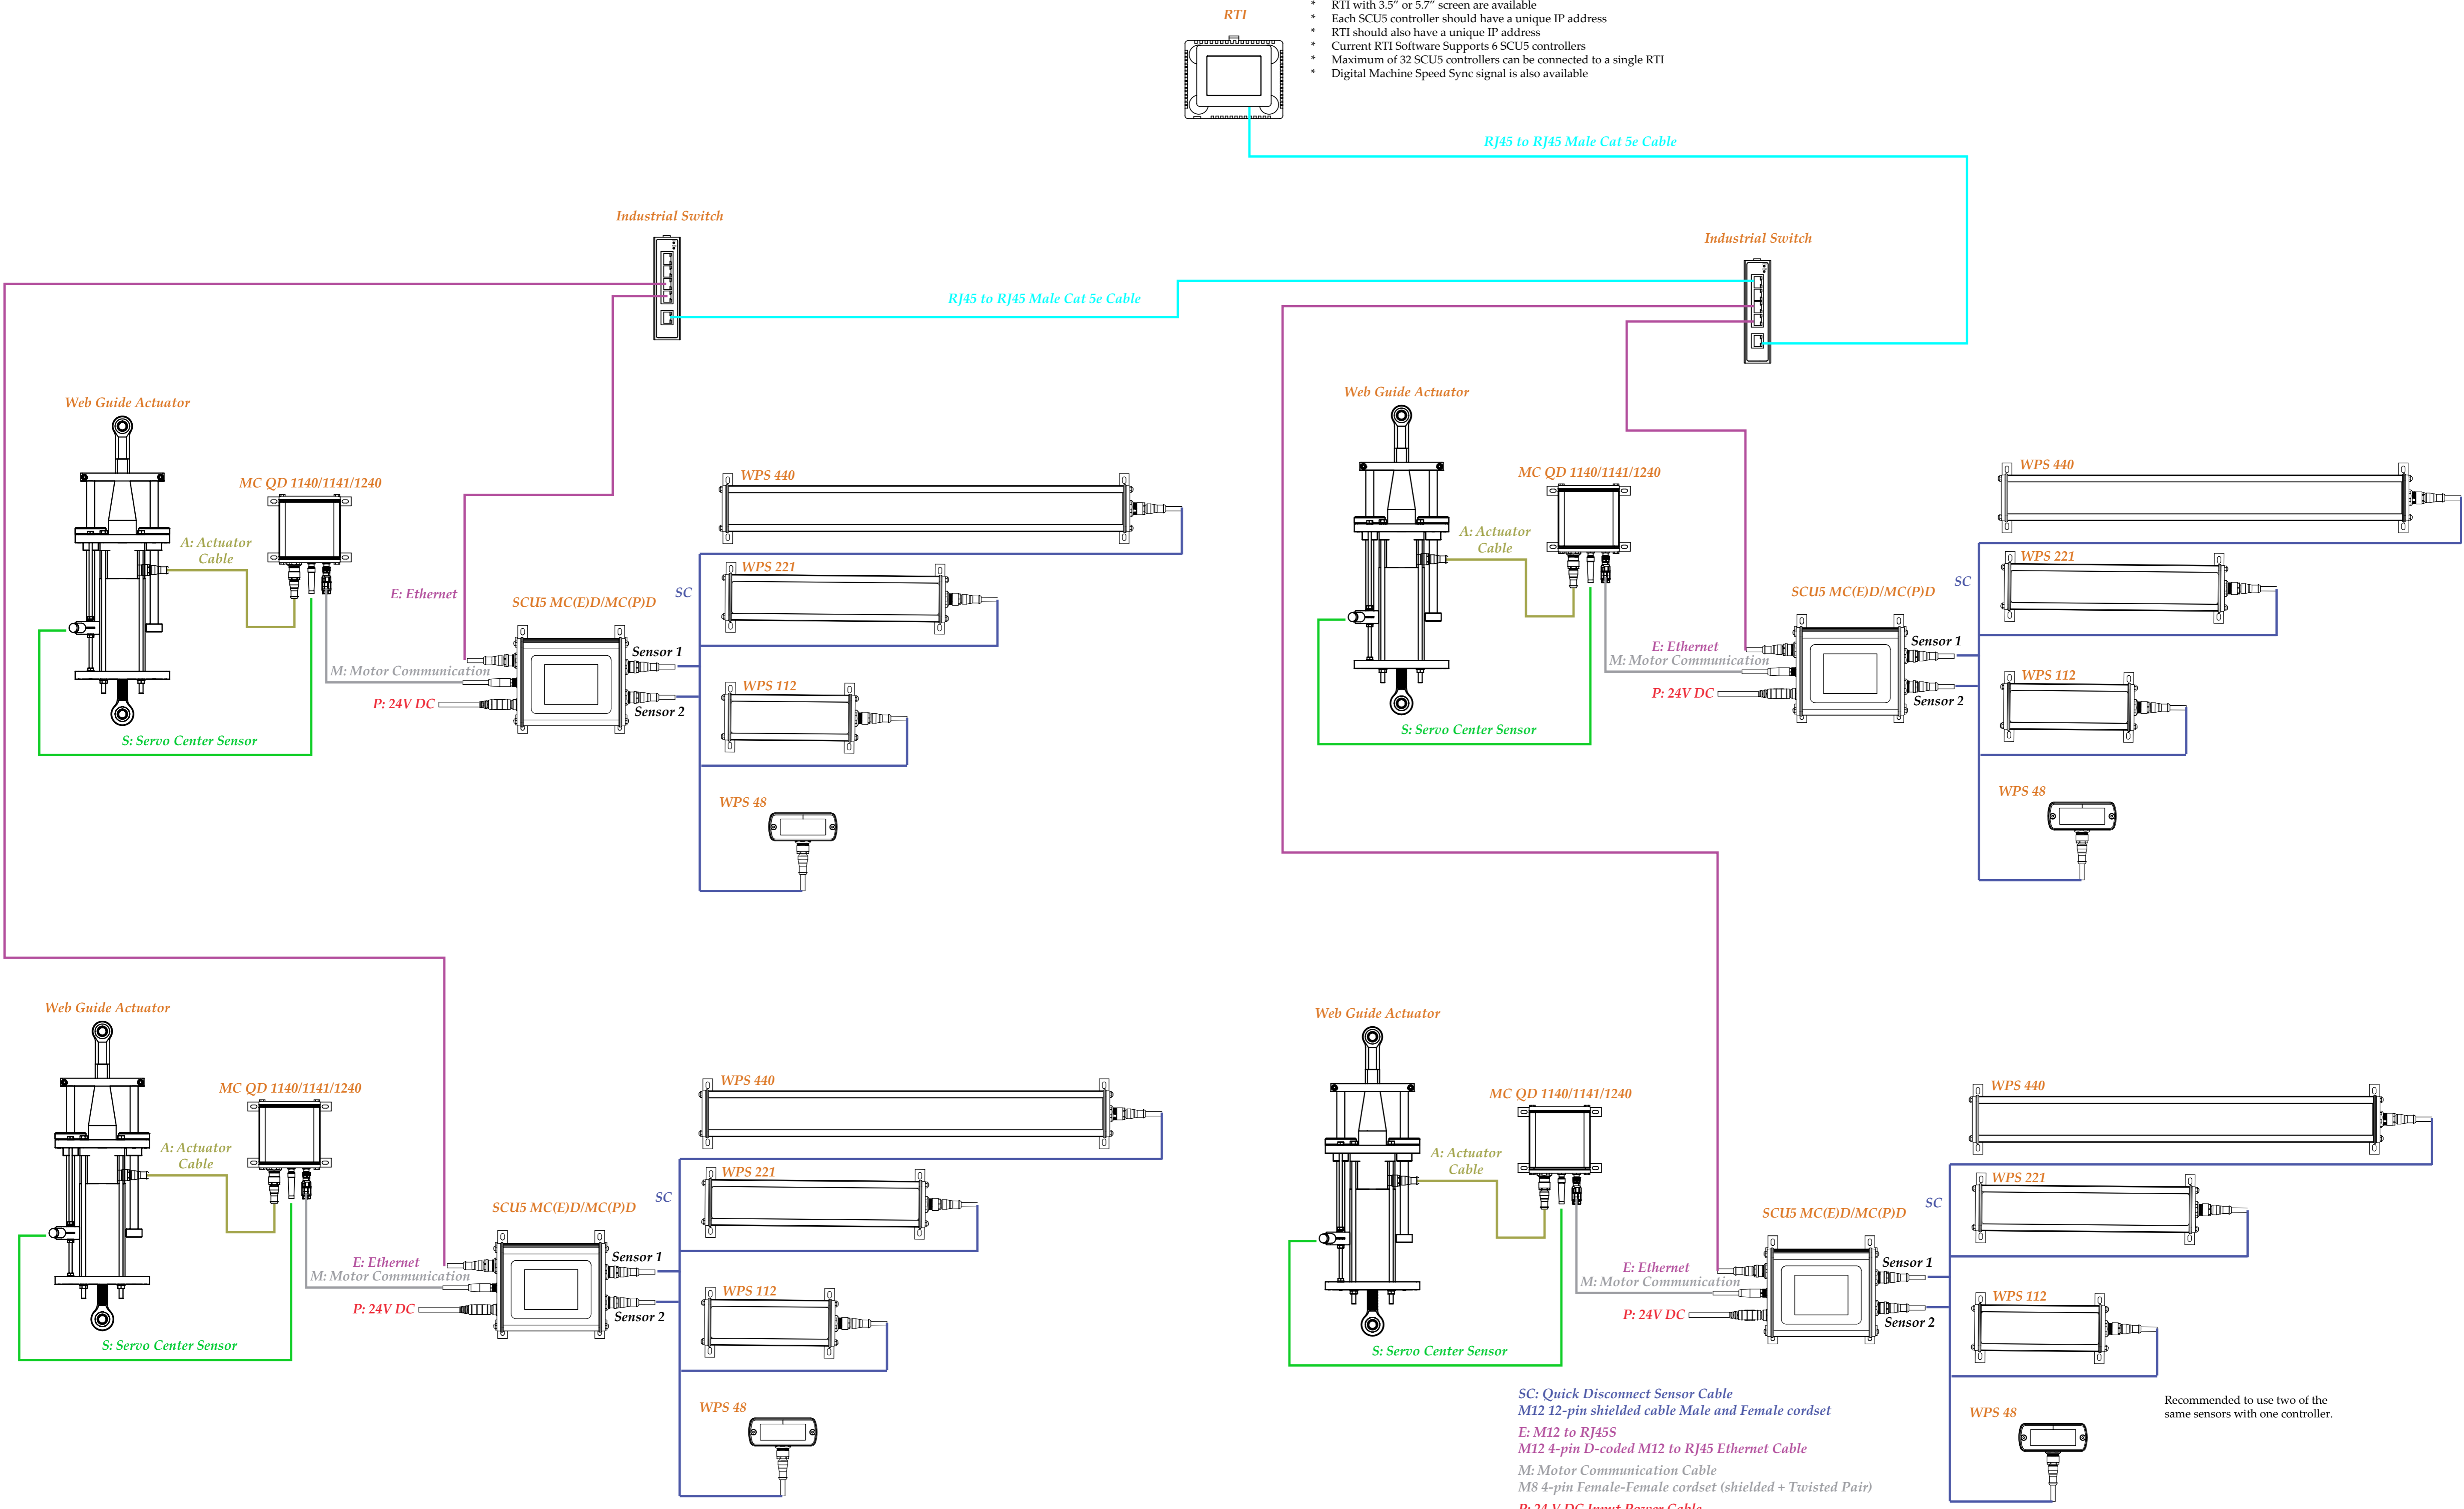

**SC:** Quick Disconnect Sensor Cable  
**M12 12-pin shielded cable Male and Female cordset**  
**E:** M12 to RJ45S  
**M12 4-pin D-coded M12 to RJ45 Ethernet Cable**  
**M:** Motor Communication Cable  
**M8 4-pin Female-Female cordset (shielded + Twisted Pair)**  
**P:** 24 V DC Input Power Cable  
**DC Power Connector 2.5mm tip for 24V DC Power flying lead**  
**S:** Servo Center Sensor Cable  
**M8 6-pin Female to M12/M8 Inductive Proximity Sensor**  
**E:** Ethernet Cable  
**RJ45 Male to RJ45 Male Ethernet Cable**

Recommended to use two of the same sensors with one controller.